


Teletronics International Inc.

3-Pole Ceramic Filter

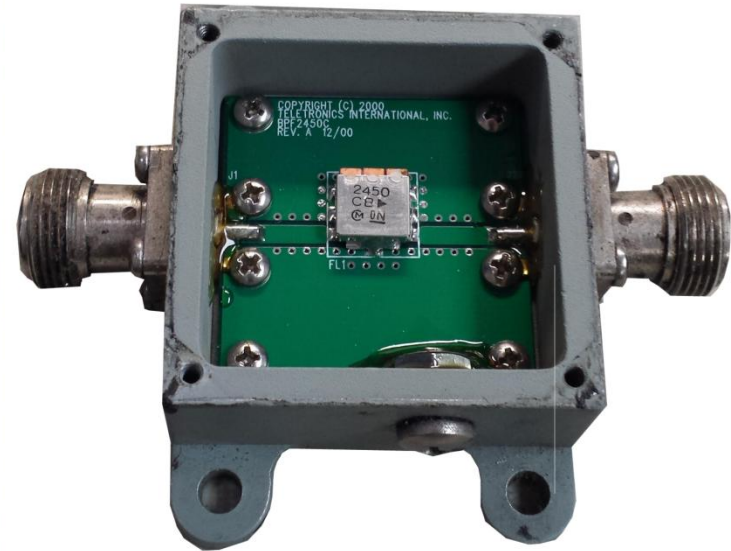


2.4GHz Band Pass Filter

- **Center Frequency:** 2442 MHz
- **Pass Band:** 2400 - 2483.5 MHz
- **Insertion Loss:** 3 dB
- **Pass Band Variation:** 1.0 dBc max
- **Return Loss:** 10dB
- **Rejection:** 2700 MHz and 1900 MHz, 45dB
- **Operating Temp:** -20 °C to 70 °C
- **No. of Poles:** 3 poles ceramic

Purchase From: RFWirelessUSA.com **Part Number** RFW-BPF06 **\$71 + S&H**

Chinese MicroStrip Band Pass Filter

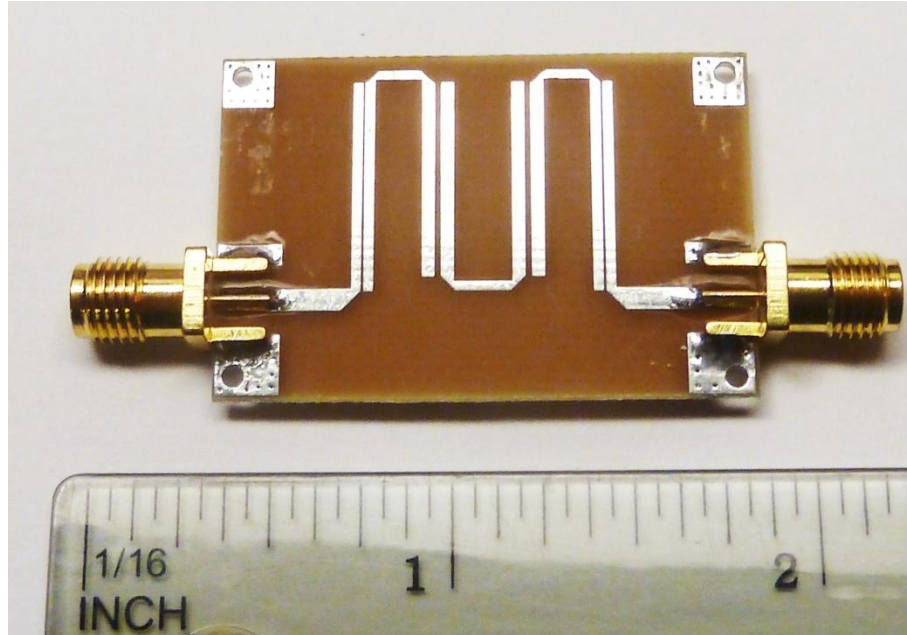

Purchase on eBay for ~ \$12

